




FlexScan®
Business Enterprise Monitor Solutions

CHOOSE EIZO



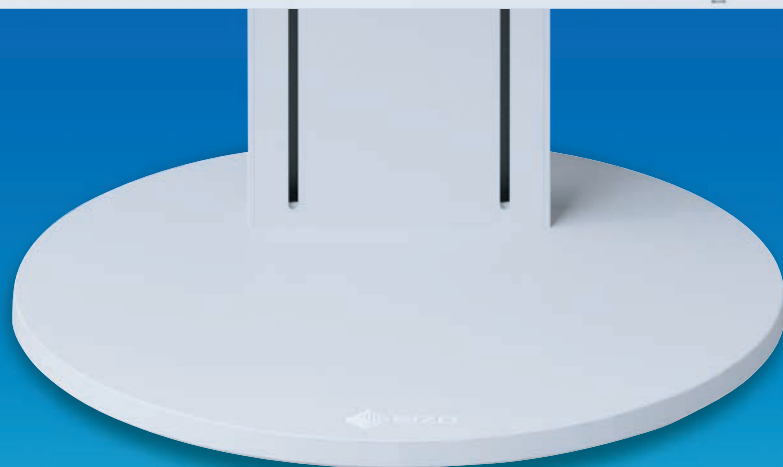

CHOOSE EIZO WORK BETTER



Connect your notebook PC to a monitor and watch your efficiency soar.



Get more CAD work done with a dual-monitor layout.

Frameless

	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
EV3285 4K USB Type-C	31.5"	3840 x 2160	IPS	178°/178°	350 cd/m ²	5 ms	USB Type-C DisplayPort HDMI x 2	USB Type-C (2 m) DisplayPort (2 m) HDMI (2 m)
EV2785 4K USB Type-C	27"	3840 x 2160	IPS	178°/178°	350 cd/m ²	5 ms	USB Type-C DisplayPort HDMI x 2	USB Type-C (2 m) DisplayPort (2 m) HDMI (2 m)
EV2780 USB Type-C	27"	2560 x 1440	IPS	178°/178°	350 cd/m ²	5 ms	USB Type-C DisplayPort HDMI	USB Type-C (2 m)
NEW EV2760	27"	2560 x 1440	IPS	178°/178°	350 cd/m ²	5 ms	DisplayPort x 2 HDMI DVI-D	DisplayPort (2 m)
EV2457 DAISY CHAIN	24.1"	1920 x 1200	IPS	178°/178°	350 cd/m ²	5 ms	DisplayPort HDMI DVI-D	DisplayPort (2 m)
EV2456	24.1"	1920 x 1200	IPS	178°/178°	350 cd/m ²	5 ms	DisplayPort HDMI DVI-D D-Sub mini 15 pin	DisplayPort (2 m)
EV2451	23.8"	1920 x 1080	IPS	178°/178°	250 cd/m ²	5 ms	DisplayPort HDMI DVI-D D-Sub mini 15 pin	DisplayPort (2 m)
NEW EV2460	23.8"	1920 x 1080	IPS	178°/178°	250 cd/m ²	5 ms	DisplayPort HDMI DVI-D D-Sub mini 15 pin	DisplayPort (2 m)

Frameless

	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
EV2450	23.8"	1920 x 1080	IPS	178°/178°	250 cd/m ²	5 ms	DisplayPort HDMI DVI-D D-Sub mini 15 pin	DisplayPort (2 m)
NEW EV2360	22.5"	1920 x 1200	IPS	178°/178°	250 cd/m ²	5 ms	DisplayPort HDMI D-Sub mini 15 pin	DisplayPort (2 m)

Wide

	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
EV2430	24.1"	1920 x 1200	IPS	178°/178°	300 cd/m ²	14 ms	DisplayPort DVI-D D-Sub mini 15 pin	DisplayPort (2 m) DVI-D (2 m)

Square

	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
EV2730Q SOFHD 1920 1920	26.5"	1920 x 1920	IPS	178°/178°	300 cd/m ²	5 ms	DisplayPort DVI-D	DisplayPort (2 m) Dual link DVI-D (2 m)
S2133	21.3"	1600 x 1200	IPS	178°/178°	420 cd/m ²	6 ms	DisplayPort DVI-D D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
S1934	19"	1280 x 1024	IPS	178°/178°	250 cd/m ²	14 ms	DisplayPort DVI-D D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
S1703-A	17"	1280 x 1024	TN	170°/160°	250 cd/m ²	5 ms	DVI-D D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
S1503-A	15"	1024 x 768	TN	160°/160°	400 cd/m ²	8 ms	DVI-D D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)

All models come with a 5-year warranty. See pages 18 - 21 for complete specifications. Supplied signal cables vary by country. Please contact EIZO for details.

Function and Beauty



Beautiful from Front to Back

White Cables for a White Cabinet

The aesthetically-pleasing design of the monitor extends to the cables. White cables come bundled with the white cabinet option.

Cable Management

To keep your desktop tidy, a cable holder and / or a cable cover are included.



Frameless Models


Frameless

Bezels that are Barely There

These monitors are virtually frameless. Even with the black borders along the perimeter of the LCD there is very little distance between the display area of each screen in a multi-monitor configuration which makes for almost seamless viewing.

Minimalist Front Surface Design

EIZO's no-compromises approach to design and functionality ensures the switches on the front of the monitor are easy to operate. Even with the minimalist front bezel, we achieved frameless design which incorporates an auto brightness sensor along with power and setting control switches by miniaturizing all these components.

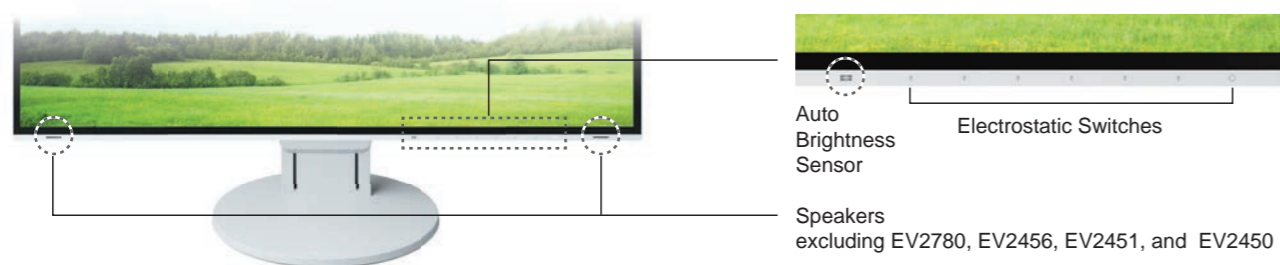

EV3285

31.5"
4K
USB Type-C



4K (3840 × 2160)

EV2785

27"
4K
USB Type-C



4K (3840 × 2160)

EV2780

27"
USB Type-C



WQHD (2560 × 1440)

EV2760

27"



WQHD (2560 × 1440)

EV2457

24.1"
DAISY CHAIN



WUXGA (1920 × 1200)

EV2456

24.1"



WUXGA (1920 × 1200)

EV2451

23.8"



FULL HD (1920 × 1080)

EV2460

23.8"



FULL HD (1920 × 1080)

EV2360

22.5"



WUXGA (1920 × 1200)



Say Goodbye to Tired Eyes


Blue Light Reduction

Paper Mode

Do you find that your screen is often too bright to read text for long hours? FlexScan monitors are equipped with 'Paper Mode' which reduces blue light to simulate paper, making it less straining on your eyes. When used in conjunction with the Auto EcoView function, blue light can be even further reduced.

- ⊖ Brightness
- ⊖ Contrast Ratio
- ⊕ Low Color Temperature


Blue Light
80%
Reduction

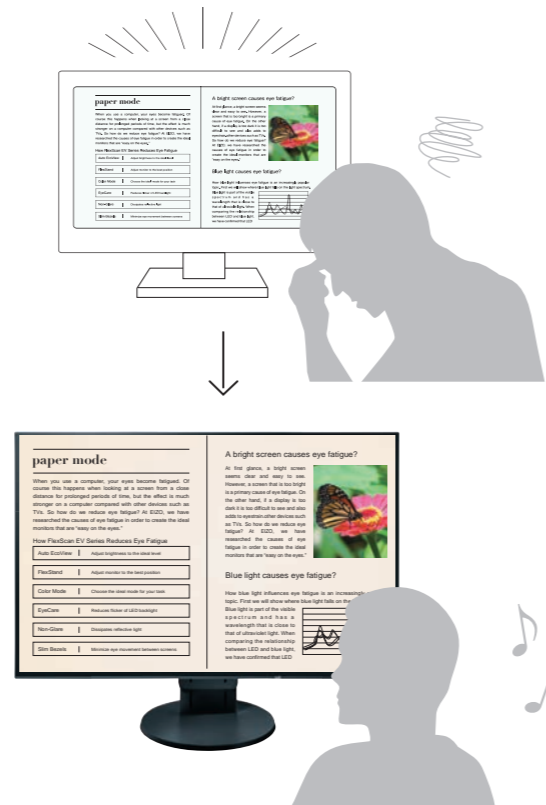

Auto Brightness Control

Always the Ideal Brightness with Auto EcoView

The Auto EcoView function automatically adjusts the brightness of your monitor according to ambient lighting. This ensures your monitor is always at the optimal brightness for reducing eye fatigue.

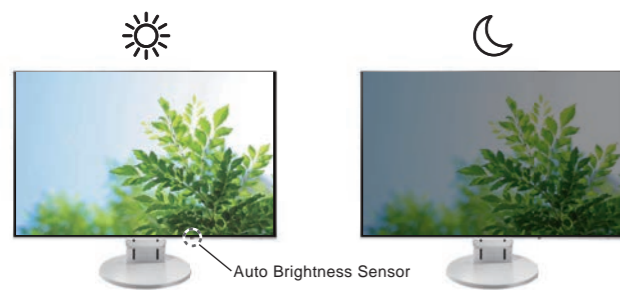

Flicker-Free Viewing

EyeCare Dimming Mode

In low brightness ranges, users may perceive flicker on a typical LED backlight, causing eye fatigue and often headaches. EyeCare is a dimming function that cuts flicker to a degree that human eyes cannot detect, reducing eye fatigue and flicker-related headaches, without affecting color stability of the monitor.


FlexScan monitors are certified by TÜV Rheinland to have low blue light and be flicker-free.



Stable Image Even on a Dark Screen

Reduce Brightness to Approximately 1 cd/m²


Frameless and Wide monitors can be adjusted to a brightness approximately 1 cd/m² without affecting the color or stability of the display.

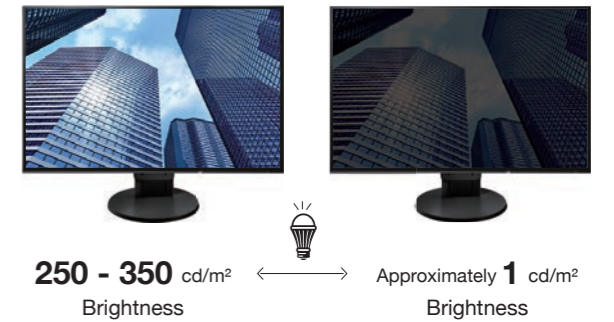

Glare Reduction

Anti-Glare Coating

FlexScan monitors are treated with an anti-glare coating to reduce screen reflections caused by ambient lighting. The coating scatters incoming light, reducing the amount of light reflected into your eyes.

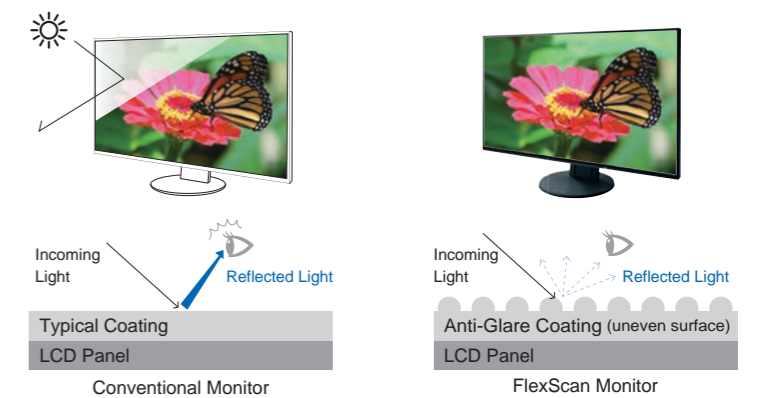

Visit Our Website

"The Latest on Computer Screens and Eye Fatigue"




Intelligent Software to Work Better



SCREEN INSTYLE

EIZO's free Screen InStyle software automatically optimizes your monitor to make your user environment more comfortable.


Compatible Models	Frameless Models
Compatible OS	Windows 10 (32-bit, 64-bit) / 8.1 (32-bit, 64-bit)

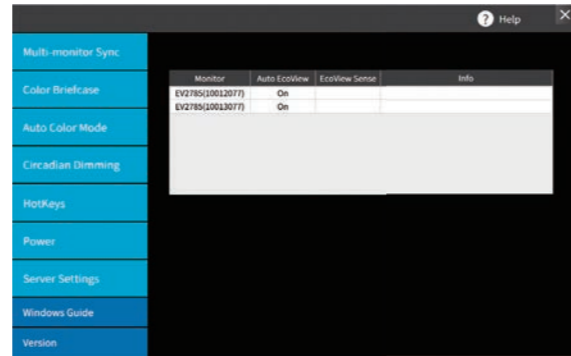

Taking Your Settings with You

Color Briefcase

This function allows you to effortlessly maintain your individual screen preferences and take them with you, even to different monitors. Your settings are automatically reflected simply by connecting your laptop to a monitor supported by Screen InStyle. This is useful in environments with hot-desking or shared workspaces, providing enhanced comfort and work efficiency.

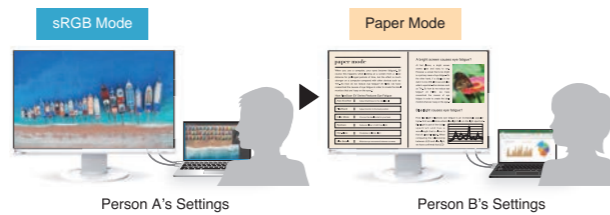

Automatically Change the Color Mode for Each Application

Auto Color Mode


FlexScan monitors have multiple color modes designed for different uses. Use the Auto Color Mode to assign a color mode to turn on when using specific applications such as those for writing documents, photo viewing, creating illustrations or watching movies. When an application is opened the screen will automatically switch to the assigned color mode, making manual switching unnecessary.



Easily Switch Between Inputs / Color Modes

Assign Hotkeys for Switching Input Signals and Color Modes


You can assign keyboard hotkeys to switch between color modes or input signals of two PCs connected to your monitor.

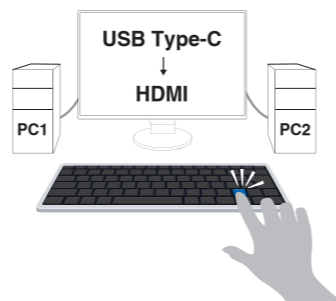

Multi-Monitor Convenience


Synchronize Screen Adjustments

When using multiple monitors, save time by synchronizing all the monitors with each other. If you change the color mode, brightness or color temperature of one monitor, the rest will automatically change to the same.

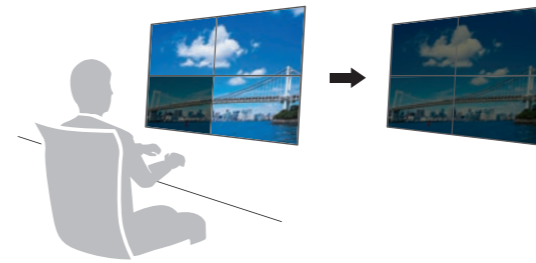

On/Off All at Once

When one monitor's power is turned off, all other monitors will also turn off. Save energy by easily turning off all monitors at once.

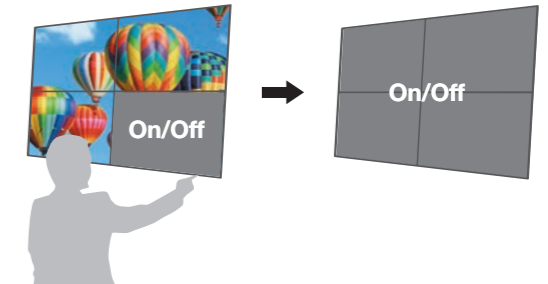


Screen InStyle Server

Effectively Monitor Asset Management

Automatically Receive Monitor or PC Information

With Screen InStyle Server receive information such as the model name and serial number of any monitor connected to your network. Additionally, see information from the computer that each monitor is connected to, such as the OS, IP address and computer name.

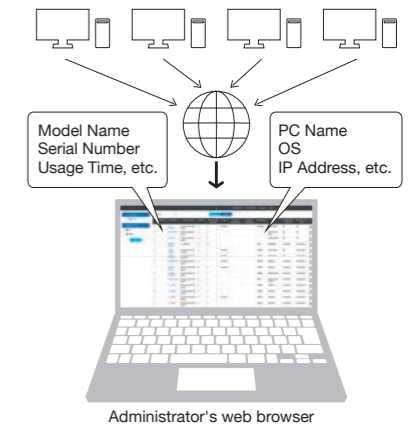

Control Settings on Multiple Monitors at Once

Manage Multiple Monitors from One Location


Control multiple monitors' settings such as color mode, brightness, and eco functions from a remote location. Furthermore, prevent unintended setting changes by locking the operation switch.

Conserve Power with Central Management

Manage various power settings of networked PCs and monitors. Set the monitor to turn off or the PC to sleep after a set period of inactivity.

Improve Security with Automatic Locking

Improve office security by setting networked PCs to automatically lock after a certain period of inactivity. This is helpful when users forget to lock their PCs before leaving their desks.

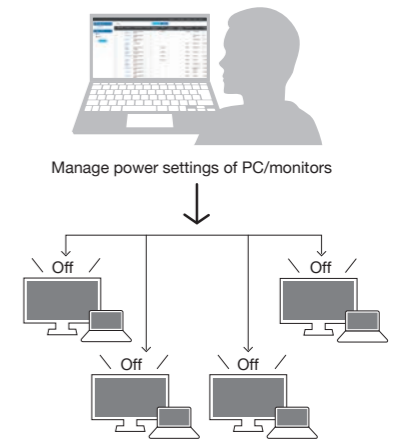

Download Screen InStyle and Screen InStyle Server Free >>>



Work Big, Comfortably

Make the Most of a Big Screen

PbyP Picture by Picture

Display multiple video signals side by side on the same screen.



Compatible Models EV3285 / EV2785 / EV2780 / EV2760



PinP Picture in Picture

Display a secondary input signal in the corner of the screen.

Compatible Models EV3285

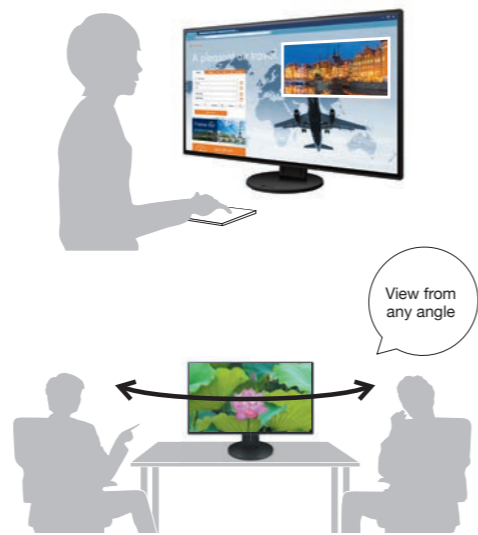

The Beauty of IPS Panels


When viewing images on large screens, colors can appear differently across the screen depending on your viewing angle. EIZO's frameless monitors adopt IPS panels which have wide viewing angles and excellent color reproduction. From below, above or rotated — colors will be displayed clearly at any angle.

One Cable Connection

USB Type-C Compatible

With the EV3285, EV2785 and EV2780, you can connect a USB Type-C compatible notebook PC with a single cable, transmitting audio and video, and supplying power* to the notebook.

*When a power supply exceeding 15 watts is supplied from the EV2780, the monitor brightness is limited to 120 cd/m².

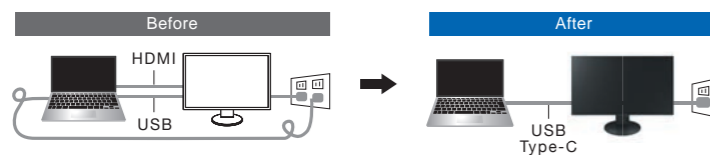

Compatible Models EV3285 / EV2785 / EV2780



Visit Our Website

Infographic: "What is USB Type-C?"




The Perfect Position

Versatile Stand

The stands feature height adjustment, tilt and swivel, while saving space and remaining stylish. Quickly and smoothly adjust your monitor to the perfect position.

The specific movement ranges of stands varies by model. Check the specifications on P18 - P21.


For the EV2456

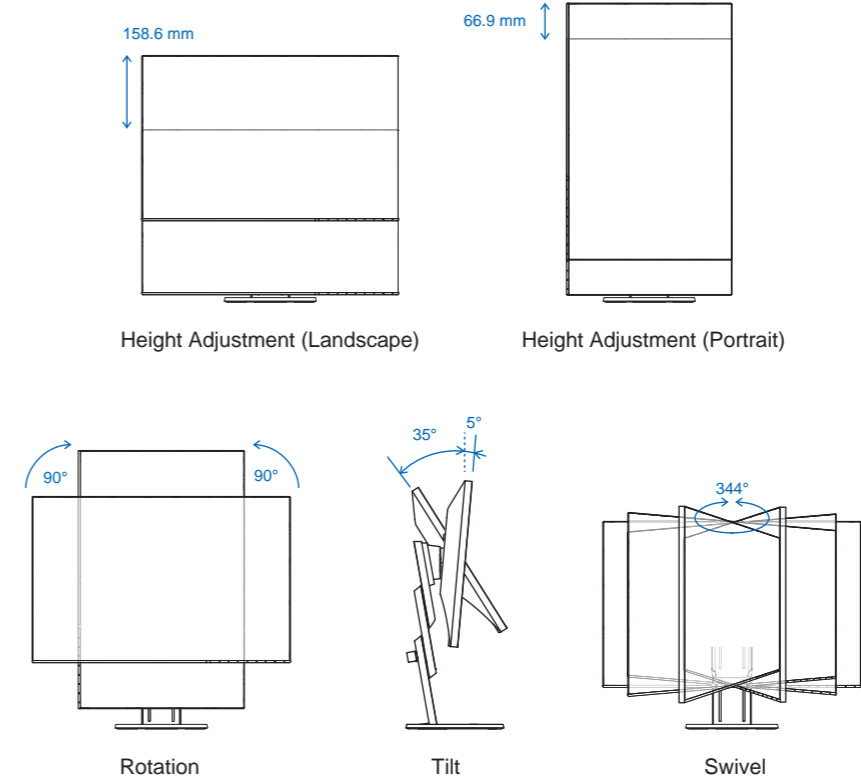

Wide Height Adjustment Range

Position the monitor to a height that allows you to work without tiring.


The specific movement ranges of stands varies by model. Check the specifications on P18 - P21.

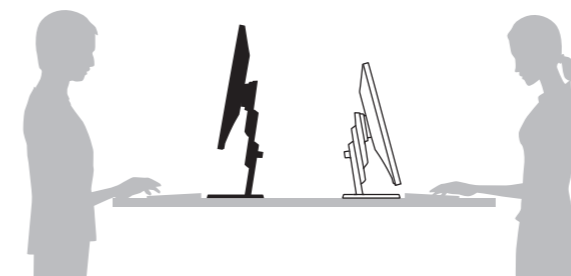

Use in Portrait or Landscape

View web pages and documents more easily by switching the monitor to portrait mode simply by rotating the screen.

The specific movement ranges of stands varies by model. Check the specifications on P18 - P21.

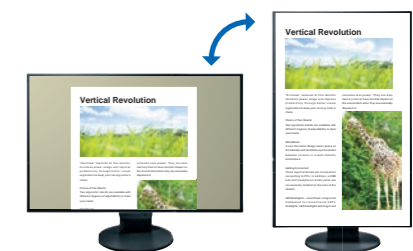


Free Up Your Workspace



Stand Bracket

The PCSK-03 / PCSK-03R is a VESA-compliant bracket for easily mounting a client terminal such as a thin client or mini PC to the back of the monitor's stand. The space the client terminal previously occupied is now freed up so you can make better use of your desktop. Even with the client terminal attached you can adjust the monitor's stand freely.

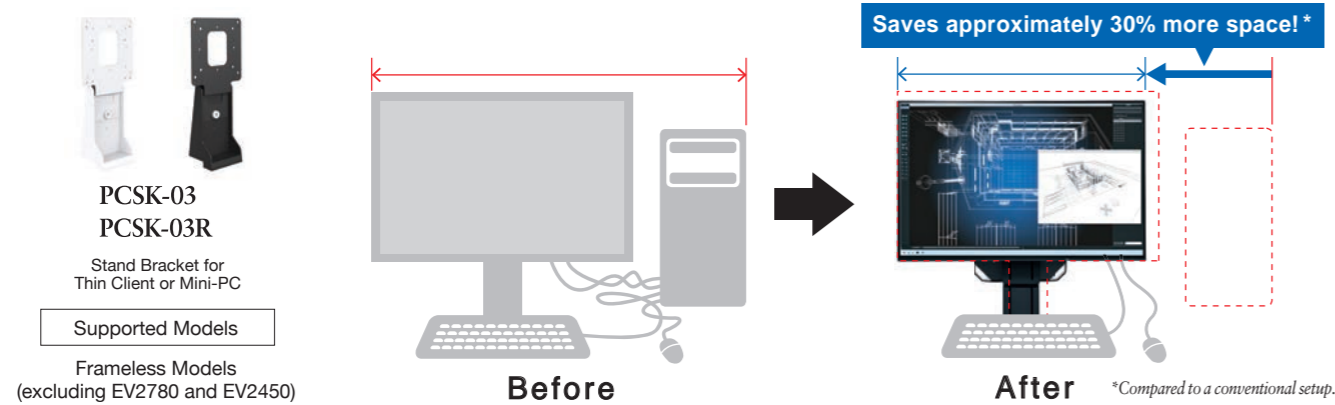


The stand has been tested with several companies' client terminals. When installed correctly the bracket does not interfere with the balance of the monitor so that even a heavy client terminal will not cause your monitor to overbalance.



Daisy Chain

With a DisplayPort 1.2 daisy chain, the EV2457 allows neat arrangement of signal cables. Because multiple monitors can be connected in a row, cabling becomes simpler and easier to manage.

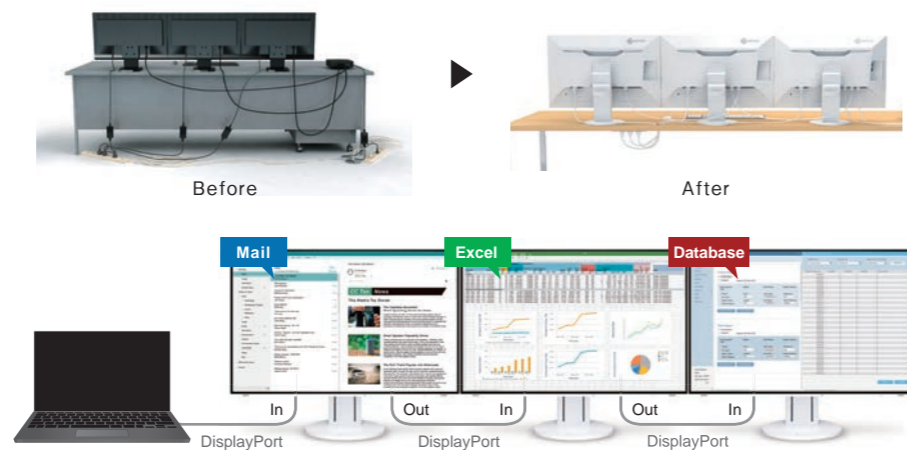

Visit Our Website

How to Setup a Daisy Chain with the EV2457 >>>



Be Eco Friendly — It's a Breeze

Automatically Reduce Power Consumption

Brightness Control with Auto EcoView

Auto EcoView automatically controls the brightness of the monitor to match ambient lighting. No more fiddling with brightness settings throughout the day, simply turn Auto EcoView on and save power while maintaining optimal visibility.



Control the Backlight with EcoView Optimizer 2

Save more power with EcoView Optimizer 2, which reduces the brightness of the backlight according to the content being displayed, all while maintaining maximum visibility.

Excludes EV2730Q, S1934, S1703-A, and S1503-A.



Auto EcoView + EcoView Optimizer 2



Certified Savings

EIZO's FlexScan frameless monitors are certified by worldwide comprehensive sustainability certifications such as TCO Certified Generation 8, EPEAT*, and EnergyStar*. This provides evidence to companies that need to verify conformance with their own procurement requirements according to ESG (environmental, social, and governance) investment or SDGs (Sustainable Development Goals) policy.

**Excludes EV2780.*



Centrally Manage Energy Consumption

Screen InStyle Server

With Screen InStyle Server, centrally control the powering off of all monitors connected to the PC network. Conserve energy without relying on each user to turn monitors off after use.

See P11 for more details



Warranty

Five-Year Warranty

A 5-year manufacturer's warranty covers all components including the LCD panel to ensure a long service life.



Zero Bright Pixels

EIZO guarantees zero bright sub-pixels for six months from the purchase date.

Applies to all Frameless monitors, EV2430, and EV2730Q



Accessories

Wall Mount Arm

The LA-011-W is a single-axis arm with a minimum profile and tilt/swivel.

Supported Monitors: EV3285, EV2785, EV2780, EV2760, EV2730Q, and S2133



Dual Height Adjustable Stand

Mount two monitors in either portrait or landscape orientation. Height is adjustable in six stages and cable housing in the back of the stand contributes to a clutter-free desktop.

Supported Monitors: S2133, S1934, and S1703-A



Protection Panels

These panels protect against dust and scratches. They come in reversible glossy and anti-glare sides.

Supported Monitors: EV2430, S2133, S1934, and S1703-A



Screen Cleaner Kit

Keep your screen free from dust and fingerprints with this screen cleaner kit. Includes pump spray and cloth.



Software

Monitor Control Utility

Screen InStyle is software for managing single or multi-monitor configurations. See pages 10 - 11 for details.

Monitor Control for Systems Administrators

EIZO Monitor Configurator lets administrators control the settings of all FlexScan flameless monitors with a USB connection. Settings can be saved as an xml file and applied to other monitors.

Case Studies



Mizuho Securities

Country: Japan / Product Deployed: FlexScan EV2750 (Successor : EV2760)

Mizuho Securities replaced their previous desk installation of eight 19-inch square LCD monitors which were positioned on arm mounts, with four 27-inch FlexScan EV2750 monitors. EIZO's highly flexible stand allowed Mizuho Securities to adjust the height and rotate the screens into portrait mode without needing arm mounts. Furthermore, with the EV2750's picture-by-picture function, they were able to secure eight unique display areas on only four screens.



Festo

Country: Germany / Product Deployed: FlexScan EV2450

Festo is a global manufacturer of process control and factory automation technology. They use two FlexScan monitors at each work station in their new 12,000 square meter Automation Center at the Esslingen site in Germany. The narrow bezel makes the monitor look almost frameless in the dual-screen solution. In addition, it has a good price-performance ratio and a five-year guarantee spanning the product's entire service life.



Zuiderzeeland Regional Water Authority

Country: The Netherlands / Product Deployed: FlexScan EV2450

The Zuiderzeeland Regional Water Authority provides clean and sufficient water with dikes, pumping stations, and wastewater treatment plants throughout Flevoland Province, the Netherlands. The Water Authority chose to use the FlexScan EV2450 for office work, CAD drawing and Geoweb administration. Since installing the monitors they have saved over 50% in electrical costs.



Tobii Pro

Country: Sweden / Product Deployed: FlexScan EV2451

Tobii Pro is the leading provider of research solutions and services designed to deepen understanding of human behavior. They use the FlexScan EV2451 with their eye-tracking solutions to display image and video stimuli that serves as a high-end research tool for both academia and commercial researchers. In addition to high-image quality, the monitor's sleek design is almost non-intrusive for the user.

SPECIFICATIONS

FlexScan®			Frameless			
			EV3285	EV2785	EV2780	
Model Variations	With Stand	Black Gray	EV3285-BK	EV2785-BK	EV2780-BK	
	Without Stand	Black Gray	EV3285-FBK	EV2785-FBK	EV2780-FBK	
Panel	Type		EV3285-FWT	EV2785-FWT	EV2780-FWT	
	Backlight		IPS	IPS	IPS	
	Size		31.5" / 80 cm	27" / 68.5 cm	27" / 68.5 cm	
	Native Resolution		3840 x 2160 (16:9 aspect ratio)	3840 x 2160 (16:9 aspect ratio)	2560 x 1440 (16:9 aspect ratio)	
	Viewable Image Size (H x V)		697.3 x 392.2 mm	596.7 x 335.7 mm	596.7 x 335.7 mm	
	Pixel Pitch / Pixel Density		0.182 x 0.182 mm / 140 ppi	0.155 x 0.155 mm / 163 ppi	0.233 x 0.233 mm / 109 ppi	
	Display Colors		16.77 million	16.77 million	16.77 million	
	Viewing Angles (H/V, typ.)		178° / 178°	178° / 178°	178° / 178°	
	Brightness (typ.)		350 cd/m ²	350 cd/m ²	350 cd/m ²	
	Contrast Ratio (typ.)		1300:1	1000:1	1000:1	
	Response Time (typ.)		5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	
	Video Signals	Input Terminals		USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 2.2 / 1.4) x 2	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 2.2 / 1.4) x 2	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4)
Output Terminals			-	-	-	
Digital Scanning Frequency (H / V)			USB Type-C: 31 - 134 kHz / 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 134 kHz / 29 - 31 Hz and 59 - 61 Hz HDMI: 31 - 135 kHz / 29 - 31 Hz and 49 - 61 Hz	USB Type-C: 31 - 134 kHz / 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 134 kHz / 29 - 31 Hz and 59 - 61 Hz HDMI: 31 - 135 kHz / 29 - 31 Hz and 49 - 61 Hz	USB Type-C: 31 - 89 kHz / 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 89 kHz / 59 - 61 Hz HDMI: 31 - 89 kHz / 29 - 31 Hz, 49 - 51 Hz and 59 - 61 Hz	
Analog Scanning Frequency (H / V)			-	-	-	
Sync Formats			-	-	-	
USB		Upstream		USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 60 W max.)	USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 60 W max.)	USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 30 W max.)
Downstream			USB 3.1 Gen 1: Type-A x 2 (Battery Charging 10.5 W max. x 1)	USB 3.1 Gen 1: Type-A x 2 (Battery Charging 10.5 W max. x 1)	USB 3.1 Gen 1: Type-A x 2	
Audio		Speakers		1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W
Input Terminals			USB Type-C, DisplayPort, HDMI x 2	USB Type-C, DisplayPort, HDMI x 2	USB Type-C, DisplayPort, HDMI	
Output Terminals			Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	
Power	Power Requirements		AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	
	Typical Power Consumption		32 W	31 W	23 W	
	Maximum Power Consumption		163 W	163 W	96 W	
	Power Save Mode		0.5 W or less	0.5 W or less	0.5 W or less	
	Features & Functions	Preset Modes		Color mode (User1, User2, sRGB, Paper, Movie, DICOM)	Color mode (User1, User2, sRGB, Paper, Movie, DICOM)	Color mode (User1, User2, sRGB, Paper, Movie, DICOM)
Auto EcoView		Yes	Yes	Yes		
Physical Specifications	Dimensions (Landscape, W x H x D)		717.4 x 427.3 - 576.2 x 230 mm	611.4 x 367.3 - 545.2 x 230 mm	611.6 x 390.2 - 545.2 x 245 mm	
Dimensions (Portrait, W x H x D)		-	356.3 x 622.4 - 675.7 x 230 mm	359 x 622.6 - 675.8 x 245 mm	359 x 622.6 - 675.8 x 245 mm	
Dimensions (Without Stand, W x H x D)		717.4 x 416.3 x 51.5 mm	611.4 x 356.3 x 50 mm	611.6 x 359 x 48.5 mm		
Net Weight		11.0 kg	8.2 kg	8.1 kg		
Net Weight (Without Stand)		7.6 kg	4.9 kg	5.3 kg		
Height Adjustment Range		148.9 mm	177.9 mm	155 mm		
Tilt		35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down		
Swivel		344°	344°	344°		
Pivot		-	90°(clockwise)	90°(both clockwise and counter clockwise)		
Hole Spacing (VESA Standard)		100 x 100 mm	100 x 100 mm	100 x 100 mm		
Certifications & Standards (Please contact EIZO for the latest information.)		TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC		
Dedicated Software	Screen InStyle		Supported	Supported	Supported	
Supplied Accessories (May vary by country. Please contact EIZO for details.)	Signal Cables		USB Type-C (2 m), DisplayPort (2 m), HDMI (2 m)	USB Type-C (2 m), DisplayPort (2 m), HDMI (2 m)	USB Type-C (2 m)	
	Others		AC power cord (2 m), cable cover (EV3285), Screw for VESA mount x 4, setup guide	AC power cord (2 m), cable cover (EV2785), Screw for VESA mount x 4, setup guide	AC power cord (2 m), Cable holder (EV2780), Screw for VESA mount x 4, CD-ROM (PDF user's manual), setup guide	
Warranty ¹		Five Years	Five Years	Five Years		
Zero Bright Pixels ²		Yes	Yes	Yes		
Dimension Diagrams (Unit:mm)						

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. ¹ Usage time is limited to 30,000 hours. ² 6 months from the date of purchase.

FlexScan®					Frameless				
					EV2760	EV2457	EV2456	EV2451	
Model Variations	With Stand	Black Gray	EV2760-BK	EV2457-BK	EV2456-BK	EV2451-BK			
	Without Stand	Black Gray	EV2760-FBK	EV2457-FBK	EV2456-FBK	EV2451-FBK			
Panel	Type		EV2760-FWT	EV2457-FWT	EV2456-FWT	EV2451-FWT			
	Backlight		IPS	IPS	IPS	IPS			
	Size		27" / 68.5 cm	24.1" / 61.1 cm	24.1" / 61.1 cm	23.8" / 60.4 cm			
	Native Resolution		2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1080 (16:9 aspect ratio)			
	Viewable Image Size (H x V)		596.7 x 335.7 mm	518.4 x 324 mm	518.4 x 324 mm	527 x 296.5 mm			
	Pixel Pitch / Pixel Density		0.233 x 0.233 mm / 109 ppi	0.270 x 0.270 mm / 94 ppi	0.270 x 0.270 mm / 94 ppi	0.275 x 0.275 mm / 93 ppi			
	Display Colors		16.77 million	16.77 million	16.77 million	16.77 million			
	Viewing Angles (H/V, typ.)		178° / 178°	178° / 178°	178° / 178°	178° / 178°			
	Brightness (typ.)		350 cd/m ²	350 cd/m ²	350 cd/m ²	250 cd/m ²			
	Contrast Ratio (typ.)		1000:1	1000:1	1000:1	1000:1			
	Response Time (typ.)		5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)			
	Video Signals	Input Terminals		DisplayPort (HDCP 1.3) x 2, HDMI (HDCP 1.4), DVI-D (HDCP 1.4)	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4)	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin		
Output Terminals			-	DisplayPort (daisy chain)	-	-			
Digital Scanning Frequency (H / V)			DisplayPort: 31 - 89 kHz / 59 - 61 Hz HDMI: 31 - 89 kHz / 29 - 31 Hz, 49 - 51 Hz, 59 - 61 Hz DVI: 31 - 89 kHz / 29 - 31 Hz, 59 - 61 Hz	DisplayPort (daisy chain) DisplayPort: 31 - 76 kHz / 59 - 61 Hz HDMI: 15 - 76 kHz / 49 - 51 Hz and 59 - 61 Hz DVI: 31 - 76 kHz / 59 - 61 Hz	DisplayPort: 31 - 76 kHz / 59 - 61 Hz HDMI: 15 - 76 kHz / 49 - 51 Hz and 59 - 61 Hz DVI: 31 - 76 kHz / 59 - 61 Hz	DisplayPort: 31 - 68 kHz / 59 - 61 Hz HDMI: 15 - 68 kHz / 49 - 51 Hz and 59 - 61 Hz DVI: 31 - 68 kHz / 59 - 61 Hz			
Analog Scanning Frequency (H / V)			-	-	-	-			
Sync Formats			-	-	Separate	Separate			
USB		Upstream		USB 3.1 Gen 1: Type-B	USB 3.1 Gen 1: Type-B	USB 3.1 Gen 1: Type-B			
Downstream			USB 3.1 Gen 1: Type-A x 4	USB 3.1 Gen 1: Type-A x 4	USB 3.1 Gen 1: Type-A x 2	USB 3.1 Gen 1: Type-A x 2			
Audio		Speakers		1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W			
Input Terminals			Stereo mini jack, DisplayPort x 2, HDMI	Stereo mini jack, DisplayPort, HDMI	Stereo mini jack, DisplayPort, HDMI	Stereo mini jack, DisplayPort, HDMI			
Output Terminals			Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)			
Power	Power Requirements		AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz			
	Typical Power Consumption		16 W	11 W	11 W	13 W			
	Maximum Power Consumption		67 W	59 W	44 W	42 W			
	Power Save Mode		0.5 W or less	0.5 W or less	0.5 W or less	0.5 W or less			
	Features & Functions	Preset Modes		Color mode (User1, User2, sRGB, Paper, Movie, DICOM)	Color mode (User1, User2, sRGB, Paper, Movie, DICOM)	Color mode (User1, User2, sRGB, Paper, Movie, DICOM)			
Auto EcoView		Yes	Yes	Yes	Yes				
Physical Specifications	Dimensions (Landscape, W x H x D)		611.7 x 376.3 - 545.3 x 230 mm	531 x 353.3 - 510.1 x 190 mm	531 x 351.4 - 510.1 x 190 mm	537.7 x 322.7 - 495.4 x 190 mm			
Dimensions (Portrait, W x H x D)		364.4 x 623.3 - 675.9 x 230 mm	343.8 x 540.5 - 607.4 x 190 mm	341.9 x 540.5 - 607.4 x 190 mm	313.1 x 547.3 - 610.7 x 190 mm				
Dimensions (Without Stand, W x H x D)		611.7 x 364.4 x 53.7 mm	531 x 343.8 x 45.5 mm	531 x 341.9 x 45.5 mm	537.7 x 313.1 x 45.5 mm				
Net Weight		8.5 kg	5.8 kg	5.7 kg	5.5 kg				
Net Weight (Without Stand)		5.7 kg	3.8 kg	3.7 kg	3.5 kg				
Height Adjustment Range		169 mm	156.8 mm	158.6 mm	172.7 mm				
Tilt		35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down				
Swivel		344°	344°	344°	344°				
Pivot		90°(both clockwise and counter clockwise)	90°(both clockwise and counter clockwise)	90°(both clockwise and counter clockwise)	90°(both clockwise and counter clockwise)				
Hole Spacing (VESA Standard)		100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm				
Certifications & Standards (Please contact EIZO for the latest information.)		TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC				
Dedicated Software	Screen InStyle		Supported	Supported	Supported				
Supplied Accessories (May vary by country. Please contact EIZO for details.)	Signal Cables		DisplayPort (2 m)	DisplayPort (2 m)	DisplayPort (2 m)				
	Others		AC power cord (2 m), USB cable (2 m), Screw for VESA mount x 4, setup guide	AC power cord (2 m), USB cable (2 m), cable cover (EV2457), Screw for VESA mount x 4, setup guide	AC power cord (2 m), USB cable (2 m), cable cover (EV2456), Screw for VESA mount x 4, CD-ROM (PDF user's manual), setup guide	AC power cord (2 m), USB cable (2 m), cable cover (EV2451), Screw for VESA mount x 4, CD-ROM (PDF user's manual), setup guide			
Warranty ¹		Five Years	Five Years	Five Years	Five Years				
Zero Bright Pixels ²		Yes	Yes	Yes	Yes				
Dimension Diagrams (Unit:mm)									

FlexScan			Frameless		Wide	
			EV2460	EV2450	EV2360	EV2430
Model Variations	With Stand	Black	EV2460-BK	EV2450-BK	EV2360-BK	EV2430-BK
		Gray	-	EV2450-GY	-	EV2430-GY
	Without Stand	White	EV2460-WT	EV2450-WT	EV2360-WT	-
		Black	EV2460-FBK	EV2450-FBK	EV2360-FBK	EV2430-FBK
Panel	Type	EV2460-FWT	EV2450-FWT	EV2360-FWT	-	
	Backlight	IPS	IPS	IPS	IPS	
Video Signals	Size	23.8" / 60.5 cm	23.8" / 60 cm	22.5" / 57.2 cm	24.1" / 61.1 cm	
	Native Resolution	1920 x 1080 (16:9 aspect ratio)	1920 x 1080 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	
	Viewable Image Size (H x V)	527 x 296.5 mm	527 x 296.5 mm	488.2 x 297.2 mm	518.4 x 324 mm	
	Pixel Pitch / Pixel Density	0.275 x 0.275 mm / 93 ppi	0.275 x 0.275 mm / 93 ppi	0.254 x 0.248 mm / 101 ppi	0.270 x 0.270 mm / 94 ppi	
	Display Colors	16.77 million	16.77 million	16.77 million	16.77 million	
	Viewing Angles (H / V, typ.)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	
	Brightness (typ.)	250 cd/m ²	250 cd/m ²	250 cd/m ²	300 cd/m ²	
	Contrast Ratio (typ.)	1000:1	1000:1	1000:1	1000:1	
	Response Time (typ.)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	14 ms (gray-to-gray)	
	Input Terminals	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin	
	Output Terminals	-	-	-	-	
	Digital Scanning Frequency (H / V)	DisplayPort: 31 - 68 kHz / 59 - 61 Hz HDMI: 15 - 68 kHz / 49 - 51, 59 - 61 Hz DVI: 31 - 68 kHz / 59 - 61 Hz	DisplayPort: 31 - 68 kHz / 59 - 61 Hz HDMI: 15 - 68 kHz / 49 - 61 Hz DVI: 31 - 68 kHz / 59 - 61 Hz	DisplayPort: 31 - 75.5 kHz / 59 - 61 Hz HDMI: 31 - 75.5 kHz / 49 - 51 Hz, 59 - 61 Hz	31 - 76 kHz / 59 - 61 Hz	
	Analog Scanning Frequency (H / V)	31 - 68 kHz / 59 - 61 Hz	31 - 81 kHz / 55 - 76 Hz	31 - 75.5 kHz / 59 - 61 Hz	31 - 76 kHz / 55 - 61 Hz	
	Sync Formats	Separate	Separate	Separate	Separate	
USB	Upstream	USB 3.1 Gen 1: Type-B	USB 3.1 Gen 1: Type-B	USB 3.1 Gen 1: Type-B	USB 2.0: Type-B	
	Downstream	USB 3.1 Gen 1: Type-A x 4	USB 3.1 Gen 1: Type-A x 2	USB 3.1 Gen 1: Type-A x 2	USB 2.0: Type-A x 2	
Audio	Speakers	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	
	Input Terminals	Stereo mini jack, DisplayPort, HDMI	Stereo mini jack, DisplayPort, HDMI	Stereo mini jack, DisplayPort, HDMI	Stereo mini jack, DisplayPort	
Power	Output Terminals	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	
	Power Requirements	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	
	Typical Power Consumption	10 W	11 W	11 W	12 W	
	Maximum Power Consumption	50 W	44 W	37 W	36 W	
Features & Functions	Power Save Mode	0.5 W or less	0.3 W or less	0.5 W or less	0.3 W or less	
	Presets Modes	Color mode (User1, User2, sRGB, Paper, Movie, DICOM)	Color mode (User1, User2, sRGB, Paper, Movie, DICOM)	Color mode (User1, User2, sRGB, Paper, Movie, DICOM)	Color mode (User1, User2, sRGB, Paper, Movie)	
	Auto EcoView	Yes	Yes	Yes	Yes	
Physical Specifications	EcoView Sense	Yes	Yes	Yes	Yes	
	Dimensions (Landscape, W x H x D)	537.8 x 333.6 - 473.6 x 233 mm	537.6 x 368 - 473.5 x 233 mm	499 x 333.9 - 473.9 x 233 mm	552.5 x 368 - 499 x 233 mm	
	Dimensions (Portrait, W x H x D)	320.4 x 550.3 - 588.9 x 233 mm	317.6 x 547.6 - 588.8 x 233 mm	321.3 x 510.5 - 569.5 x 233 mm	358 x 562 - 596 x 233 mm	
	Dimensions (Without Stand, W x H x D)	537.8 x 320.4 x 53.6 mm	537.6 x 317.6 x 47.9 mm	499 x 321.3 x 53.6 mm	552.5 x 358 x 56.9 mm	
	Net Weight	5.9 kg	6.2 kg	5.5 kg	6.7 kg	
	Net Weight (Without Stand)	3.8 kg	3.8 kg	3.4 kg	4.3 kg	
	Height Adjustment Range	140 mm	140 mm	140 mm	131 mm	
	Tilt	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	
	Swivel	344°	344°	344°	344°	
	Pivot	90°(both clockwise and counter clockwise)	90°(both clockwise and counter clockwise)	90°(both clockwise and counter clockwise)	90°(clockwise)	
Hole Spacing (VESA Standard)	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm		
Certifications & Standards (Please contact EIZO for the latest information.)		TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC				
Dedicated Software	Screen InStyle	Supported				
Supplied Accessories (May vary by country. Please contact EIZO for details.)	Signal Cables	DisplayPort (2 m)				
	Others	AC power cord (2 m), USB cable (2 m), Screw for VESA mount x 4, setup guide				
Warranty ¹	Five Years					
Zero Bright Pixels ²	Yes					
Dimension Diagrams (Unit:mm)						

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. ¹ Usage time is limited to 30,000 hours. ² 6 months from the date of purchase.

FlexScan		Square					
		EV2730Q	S2133	S1934	S1703-A	S1503-A	
Model Variations	With Stand	Black	EV2730Q-BK	S2133-HBK	S1934-HBK / S1934-TBK	S1703-AHBK / S1703-ATBK	S1503-ATBK
		Gray	EV2730Q-GY	S2133-HGY	S1934-HGY / S1934-TGY	S1703-AHGY / S1703-ATGY	S1503-ATGY
	Without Stand	White	-	-	-	-	-
		Black	EV2730Q-FBK	S2133-FBK	S1934-FBK	S1703-AFBK	S1503-AFBK
Panel	Type	EV2730Q-FGY	S2133-FGY	S1934-FGY	S1703-AFGY	S1503-AFGY	
	Backlight	IPS	IPS	IPS	TN	TN	
Video Signals	Size	26.5" / 67 cm	21.3" / 54 cm	19" / 48 cm	17" / 43.3 cm	15" / 38 cm	
	Native Resolution	1920 x 1920 (1:1 aspect ratio)	1600 x 1200 (4:3 aspect ratio)	1280 x 1024 (5:4 aspect ratio)	1280 x 1024 (5:4 aspect ratio)	1024 x 768 (4:3 aspect ratio)	
	Viewable Image Size (H x V)	475.7 x 475.7 mm	432 x 324 mm	374.8 x 299.8 mm	337.9 x 270.3 mm	304.1 x 228.1 mm	
	Pixel Pitch / Pixel Density	0.248 x 0.248 mm / 103 ppi	0.270 x 0.270 mm / 94 ppi	0.293 x 0.293 mm / 87 ppi	0.264 x 0.264 mm / 96 ppi	0.297 x 0.297 mm / 86 ppi	
	Display Colors	16.77 million	16.77 million from a palette of 1.06 billion	16.77 million from a palette of 1.06 billion	16.77 million from a palette of 1.06 billion	16.77 million from a palette of 1.06 billion	
	Viewing Angles (H / V, typ.)	178° / 178°	178° / 178°	178° / 178°	170° / 160°	160° / 160°	
	Brightness (typ.)	300 cd/m ²	420 cd/m ²	250 cd/m ²	250 cd/m ²	400 cd/m ²	
	Contrast Ratio (typ.)	1000:1	1500:1	1000:1	1000:1	600:1	
	Response Time (typ.)	5 ms (gray-to-gray)	6 ms (gray-to-gray)	14 ms (gray-to-gray)	5 ms (black-white-black)	8 ms (black-white-black)	
	Input Terminals	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DVI-D (HDCP 1.4), D-Sub mini 15 pin	DVI-D, D-Sub mini 15 pin	
	Output Terminals	-	-	-	-	-	
	Digital Scanning Frequency (H / V)	31 - 127 kHz / 59 - 61 Hz	31 - 76 kHz / 59 - 61 Hz	31 - 64 kHz / 59 - 61 Hz	31 - 64 kHz / 59 - 61 Hz	31 - 49 Hz / 59 - 61 Hz	
	Analog Scanning Frequency (H / V)	-	24 - 80 kHz / 49 - 76 Hz	31 - 64 kHz / 55 - 61 Hz	31 - 64 kHz / 55 - 61 Hz	31 - 49 kHz / 55 - 61 kHz	
	Sync Formats	-	Separate, Composite	Separate	Separate	Separate	
USB	Upstream	USB 2.0: Type-B	USB 2.0: Type-B	-	-		
	Downstream	USB 2.0: Type-A x 2	USB 2.0: Type-A x 2	-	-		
Audio	Speakers	1.0 W + 1.0 W	0.5 W + 0.5 W	0.5 W + 0.5 W	0.5 W + 0.5 W		
	Input Terminals	Stereo mini jack, DisplayPort	-	Stereo mini jack, DisplayPort	Stereo mini jack	Stereo mini jack	
Power	Output Terminals	Headphones (Stereo mini jack)	-	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)		
	Power Requirements	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	
	Typical Power Consumption	25 W	13 W	9 W	8 W	5 W	
	Maximum Power Consumption	64 W	45 W	21 W	18 W	16 W	
Features & Functions	Power Save Mode	0.5 W or less	0.3 W or less	0.5 W or less	0.5 W or less	0.5 W or less	
	Presets Modes	FineContrast (User1, User2, sRGB, Paper, Movie)	FineContrast (User, sRGB, Paper, Movie, DICOM)	Color mode (User1, User2, sRGB, Paper, DICOM)	Color mode (User1, User2, sRGB, Paper)	Color mode (User1, User2, sRGB, Paper)	
	Auto EcoView	Yes	Yes	Yes	Yes	Yes	
Physical Specifications	EcoView Sense	Yes	-	-	-	-	
	Dimensions (Landscape, W x H x D)	497 x 512.5 - 613.5 x 245 mm	465 x 453 - 535 x 208.5 mm	S1934-H: 405 x 406.5 - 506.5 x 205 mm S1934-T: 405 x 414 x 205 mm	S1703-AH: 367 x 391.5 - 491.5 x 205 mm S1703-AT: 367 x 384 x 188 mm	346 x 349 x 157 mm	
	Dimensions (Portrait, W x H x D)	-	361 x 505 - 587 x 208.5 mm	S1934-H: 334 x 442 - 542 x 205 mm S1934-T: -	S1703-AH: 304 x 423 - 523 x 205 mm S1703-AT: -	-	
	Dimensions (Without Stand, W x H x D)	497 x 501.5 x 56 mm	465 x 361 x 64 mm	405 x 334 x 61.5 mm	367 x 304 x 59 mm	346 x 280 x 69 mm	
	Net Weight	7.1 kg	8.6 kg	S1934-H: 5.6 kg S1934-T: 4.6 kg	S1703-AH: 5.4 kg S1703-AT: 4.4 kg	4.7 kg	
	Net Weight (Without Stand)	4.2 kg	5.6 kg	3.8 kg	3.6 kg	3.4 kg	
	Height Adjustment Range	101 mm	82 mm	S1934-H: 100 mm / S1934-T: -	S1703-AH: 100 mm S1703-AT: -	-	
	Tilt	35° Up, 5° Down	40° Up, 0° Down	S1934-H: 30° Up, 0° Down S1934-T: 30° Up, 5° Down	S1703-AH: 30° Up, 0° Down S1703-AT: 30° Up, 5° Down	30° Up, 0° Down	
	Swivel	344°	35° Right / 35° Left	S1934-H: 35° Right / 35° Left S1934-T: -	S1703-AH: 35° Right / 35° Left S1703-AT: -	-	
	Pivot	-	90°(clockwise)	S1934-H: 90°(clockwise) S1934-T: -	S1703-AH: 90°(clockwise) S1703-AT: -	-	
Hole Spacing (VESA Standard)	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm, 75 x 75 mm		
Certifications & Standards (Please contact EIZO for the latest information.)		TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade3, EAC					
Dedicated Software	Screen InStyle	-					
Supplied Accessories (May vary by country. Please contact EIZO for details.)	Signal Cables	DisplayPort (2 m), Dual Link DVI-D (2 m)					
	Others	DVI-D (2 m), D-Sub mini 15 pin (1.8 m) DVI-D (2 m), D-Sub mini 15 pin (1.8 m) DVI-D (2 m), D-Sub mini 15 pin (1.8 m) DVI-D (2 m), D-Sub mini 15 pin (1.8 m) DVI-D (2 m), D-Sub mini 15 pin (1.8 m) AC power cord (2 m), Cable holder (1.8 m), Screw for VESA mount x 4 (EV2730Q-F), EIZO LCD Utility Disk (PDF user's manual), setup guide					
Warranty ¹	Five Years						
Zero Bright Pixels ²	Yes						
Dimension Diagrams (Unit:mm)							

Innovative Solutions

Built-In Calibration Sensors




Automatically calibrates while you work

IP Decoding Solutions



In-House Optical Bonding

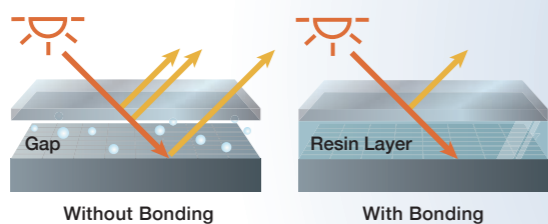

Market-Focused Cloud Solutions



Visual Technology Company



50+ Years of Expertise

Extensive Market Reach



FlexScan

Business Enterprise



ColorEdge

Creative Work



CuratOR / RadiForce

Healthcare



Research and Development



Global Reach




DuraVision

Security & Surveillance / Maritime



Manufacturing



Quality Control



Customization




Raptor / Re/Vue / SafeGuard

Air Traffic Control

Software for Improved Workflow



Use a single mouse across two PCs

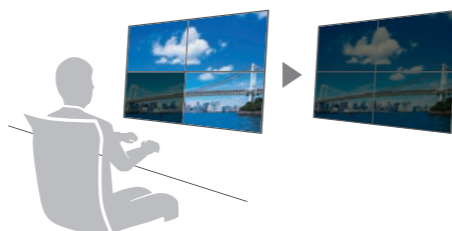

Synchronized adjustment of multiple monitors



Simplified CMS with automatic software and printer settings adjustment



FORIS

Home Entertainment


EIZO Corporation

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan
Phone +81-76-277-6794 Fax: +81-76-277-6793

www.eizoglobal.com

All product names are trademarks or registered trademarks of their respective companies. EIZO, the EIZO logo, RadiForce, RadiCS, RadiNET, CuratOR, FlexScan, ColorEdge, DuraVision, FORIS, Raptor, and ScreenManager are registered trademarks of EIZO Corporation. EIZO Monitor Configurator, EIZO ScreenSlicer, Re/Vue, SafeGuard, Screen InStyle, and ScreenCleaner are trademarks of EIZO Corporation. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. VESA is a registered trademark of Video Electronics Standards Association. ENERGY STAR is a registered trademark of the United States Environmental Protection Agency in the United States and other countries. Some screen images are used with permission from Microsoft. Specifications are subject to change without notice.

Copyright © 2020 EIZO Corporation. All rights reserved.
(200106)

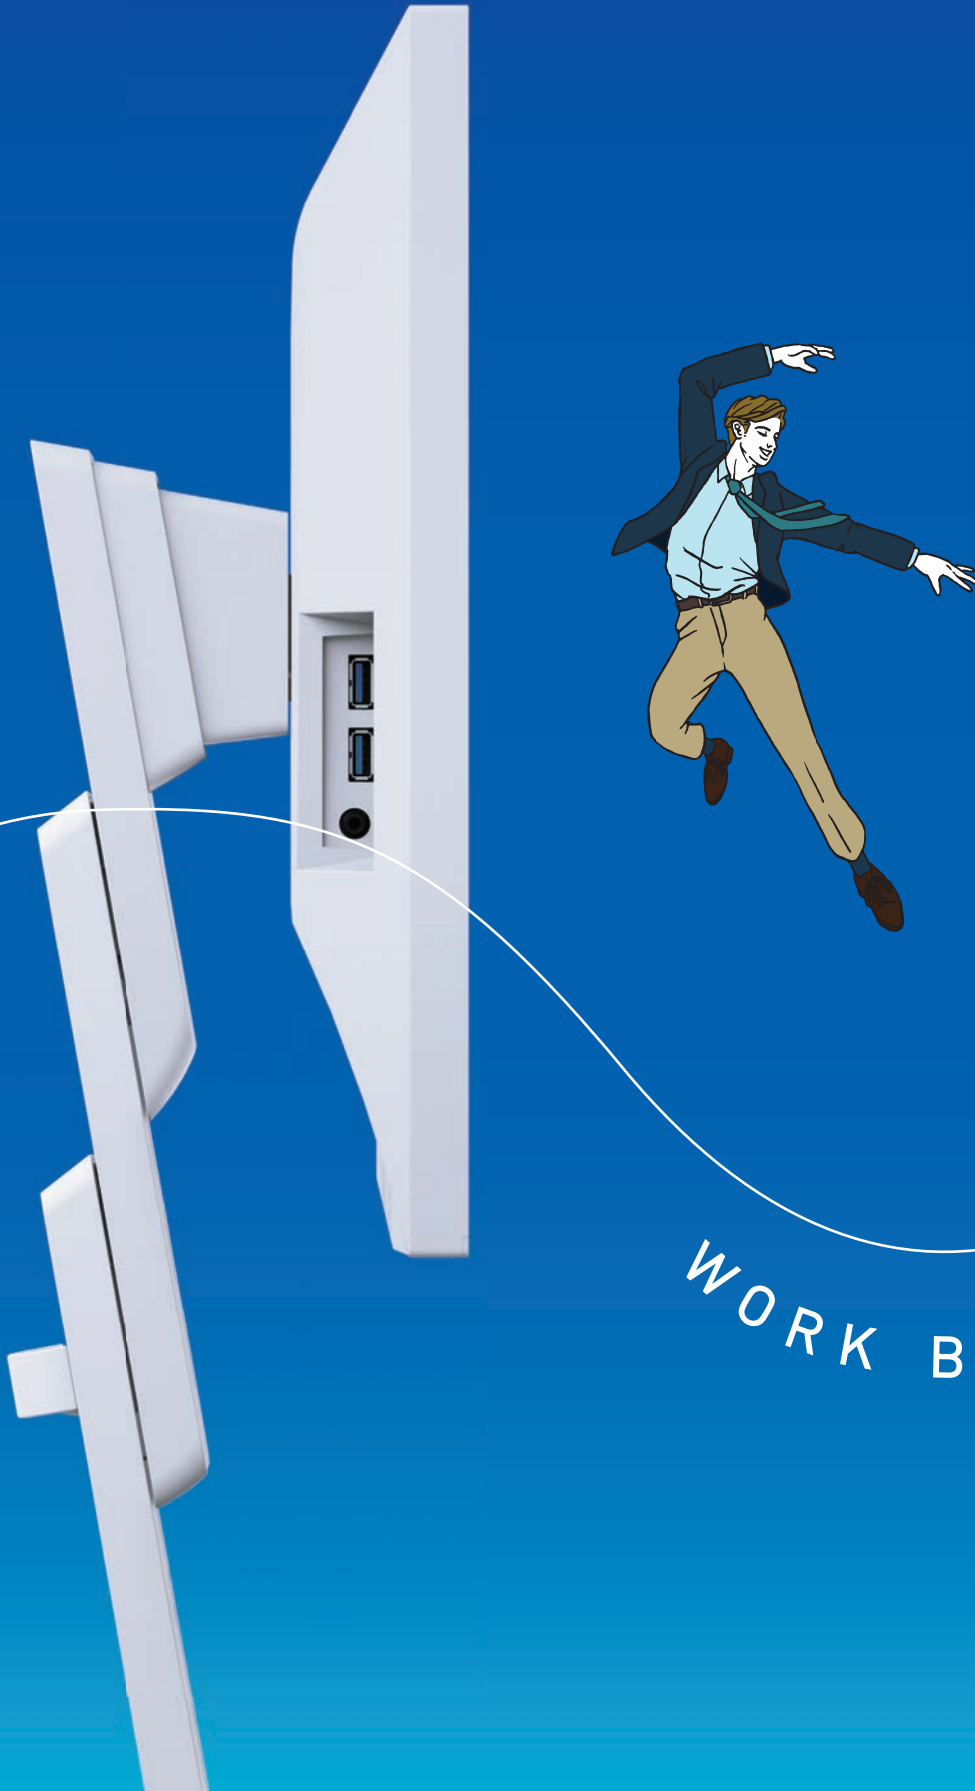

WORK BETTER